



LANDFILL COMPACTOR

MODEL : PLC250

TECHNICAL SPECIFICATIONS

POWERPAC
POWERPAC INTERNATIONAL INC., USA

MAIN SPECIFICATIONS

Length: (mm) 7355
Width:(mm) 3000
Height: (mm) 3600
Ground Clearance: (mm) 435
Operating Weight: (kg) 23500
Gradeability: (%) 100
Rolling Width: (mm) 2910
Max. Travel Speed: (km/h) 10
Wheelbase: (mm) 3350

ENGINE

Model: CAT 3306B(L)
Rated Power: (HP) 255

COMPACTION WHEEL

Wheel Width: (mm) 1040/835
Wheel Diameter (Front/rear): (mm) 1500/1500
No. of Teeth per wheel: (front/rear) 50/40

DOZER BLADE

Height: (mm) 1650
Width: (mm) 3000

BRAKES

Service brake: Air-over-oil caliper disk brakes
Parking brake: Mechanical,expanding hoofed brake steering

TRAVEL

Type: Planetary power shift
Gear: 2 Forward, 2 Reverse
Speed: (km/h) F1/R1 (4.2) F2/R2 (10)





STEERING

Steering Method: Hydraulic central articulation
Steering Angle: (°) 40
Oscillating Angle: (°) 15
Track Radius, inner: (mm) 6150

CAPACITIES

Fuel: (L) 440
Hydraulic Oil: (L) 160

OVERALL DIMENSION

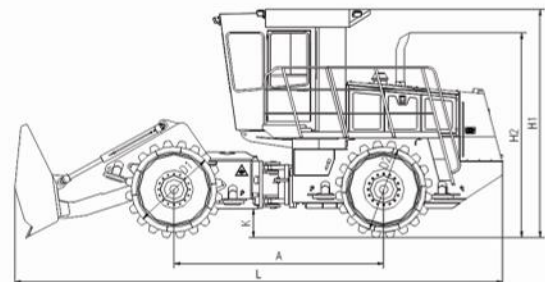

A: 3500mm
B: 3000mm
H1: 3600mm
H2: 3210mm
K: 435mm
L: 7355mm
W: 2910mm
D1/D2: 1500mm